


MANUAL WINCHING

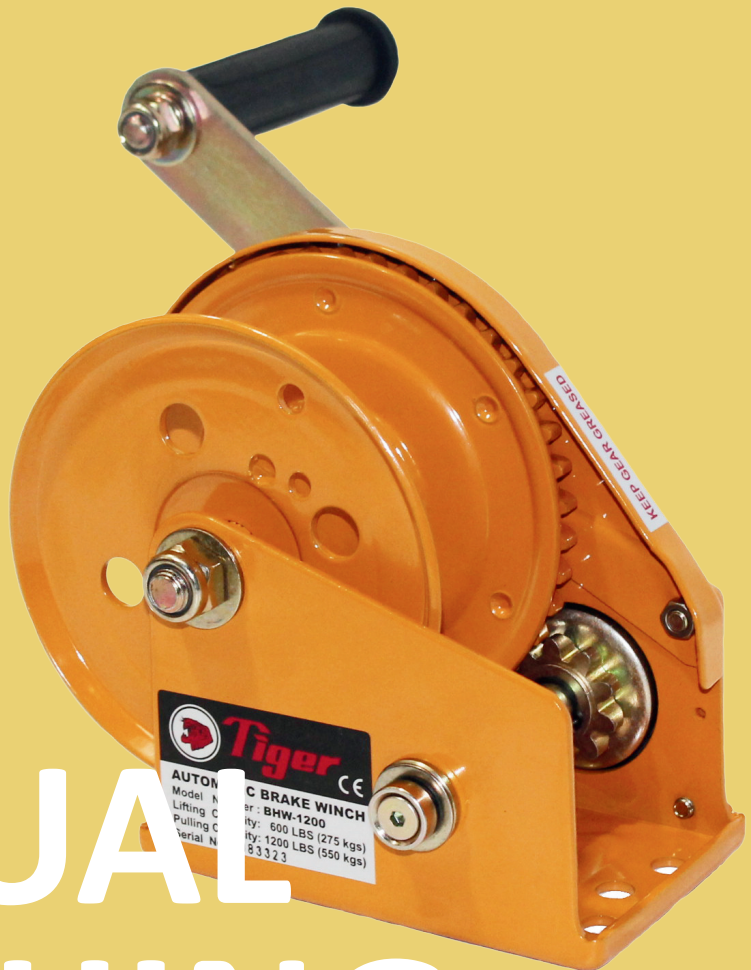

W.H. SCOTT GROUP

Manual Winching


Brake Hand Winch BHW

The Tiger Brake Winch is a high quality multi-purpose winch used for a wide variety of lifting and hoisting applications. The automatic brake ensures the load remains suspended when the crank is released and avoids unchecked descent of the load; there is no freewheeling making the hand winch extremely safe to operate. All the mechanical components are enclosed for protection against dust, dirt and rain contamination. This equipment has a lifting capacity ranging from 800lbs to 2600lbs. The BHW is compact and lightweight yet rugged and durable. These units meet and exceed all the requirements within BS EN 13157:2004+A1:2009.

- High quality multi-purpose winch.
- Automatic load-actuated brake can hold the load in any position.
- Compact, light-weight and rugged construction.
- Gears and brakes fully covered to prevent dust, dirt and rain contamination.
- Heat treated gears.
- Very low operator effort required for easy operation.
- Dual handle pinion shaft option available on all models, allows handle to be fitted on both sides.
- Universal mounting plate.
- Available as 800lb, 1200lb, 1800lb and 2600lb models.
- For cable and strap.
- Finished in high quality powder coat paint offering excellent corrosion protection.
- Available with OCP corrosion protection.
- Noiseless 1200lb model available.
- 3D drawings available on full range for project planning.
- Operating temperature of -20°C to +80°C (temperature range of -40°C to +80°C available as an option).



Dual handle option




Noiseless 1200lb option



Product Number	Pulling Capacity lbs/kg	Lifting Capacity lbs/kg			Gear Ratio	Hub Dia Ø mm	Handle Length mm	Unit Weight kg	Cable Diameter mm/inch	Cable Storage Cap. m	Strap Storage Cap. m
		First Layer	Mid Layer	Last Layer							
BHW-0800	800/360	800/360	560/254	400/180	4.1:1	Ø40	160	3.0	Ø4/Ø5/32	36	9.1
BHW-1200	1200/550	1200/550	864/392	600/275	4.1:1	Ø50	210	3.5	Ø5/Ø3/16	23	8.5
BHW-1800	1800/800	1800/800	1239/562	900/400	5:1	Ø70	320	8.0	Ø6/Ø1/4	24	14.1
BHW-2600	2600/1180	2600/1180	1861/844	1300/590	10:1	Ø82	320	10.5	Ø8/Ø5/16	18	10.6

Corrosion resistant version


This model is protected by our unique coating – OCP (Organic Compound Protection). The uniqueness of this coating gives unprecedented long term reliability and superior corrosion resistance and protection in the most severe conditions. The OCP coating provides excellent friction protection and has been proven to be effective through at least 1000 hours of the ASTM B 117 Salt Spray Test. The coating gives the properties of stainless steel without the cost implications.

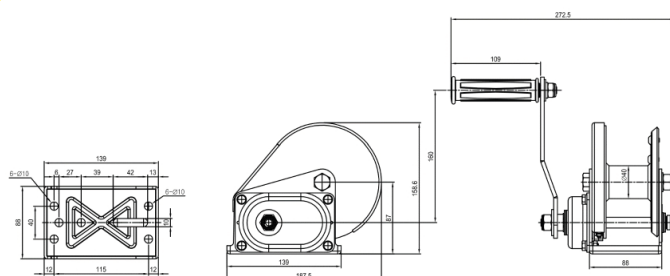

BHW - 0800



BHW - 2600



Winch Straps For pulling only

Product Number	Description	Width mm	Thickness mm	Breaking Load kg	Available For
TG-48	6m with safety hook	48	1.2	2068.5	BHW-0800 & BHW-1200
TG-54	9m with safety hook	54	1.4	2864.0	BHW-1800
TG-60	9m with safety hook	60	1.7	4136.0	BHW-2600

Wire Rope


Product Number	Description	Diameter mm	Breaking Load kg	Available For
WWR-04-03	30m with safety hook	4	1270	BHW-0800
WWR-05-20	20m with safety hook	5	2000	BHW-1200
WWR-06-22	22m with safety hook	6	3000	BHW-1800
WWR-08-16	16m with safety hook	8	4500	BHW-2600

Ceiling Mounted Winches

Ceiling Mount Winch

SF-5000 (wire)/SF-5000-S (strap)

- 5000lb/2270kg capacity.
- Split reel, which allows for the operation of two cables.
- Loop drive allows the winch to be mounted out of reach and operated with an extension pole fitted to engage the loop.
- Positive load-actuated brake can hold the load in any position.
- Gears and brake are fully covered to prevent dust, dirt and rain contamination.
- Very low operator effort is required for easy operation.

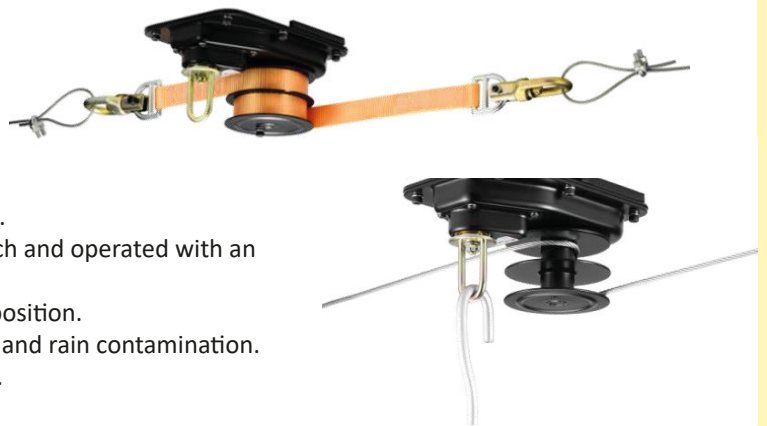

Electric Ceiling Mount Winch

SF-5000E (wire)/SF-5000E-S (strap)

- 5000lb/2270kg capacity.
- Compact and light weight.
- Split reel, which allows for the operation of two cables.
- Completely sealed to prevent dust, dirt and rain contamination.
- Brake motor for quick and safe stopping.
- Very low operator effort is required for easy operation.
- Powerful and smooth.
- Can be operated manually during power failure (option).



Heavy Duty Worm Gear Winch WL-4600

- 4600lb/2090kg capacity.
- Self-braking.
- Available in regular or split reel, which allows for operation of two lines or cables for greater versatility.
- Completely sealed to prevent dust, dirt and rain contamination.



Hand Winches



General Purpose Hand Winch
HW-2000

- 2000lb/900kg capacity
- Available in regular or split reel, which allows for the operation of two line or cables for greater versatility
- Available in handle or loop drive models
- Can be ceiling mounted with loop drive
- Operating temperature -20°C to +80°C (temperature range of -40°C to +80°C available as an option)



General Purpose Hand Winch
HW-1200



- 1200lb/545kg capacity
- Ability to disengage the gear to allow fast pay out of the cable





General Purpose Hand Winch
HW-0600

- 600lb/270kg capacity
- Ability to disengage the gear to allow fast pay out of the cable

Product Number	Pulling Capacity lbs/kg	Hand Force Required kg	Gear Ratio	Hub Diameter mm	Handle Length mm	Unit Weight (with handle) kg	Unit Weight (with loop) kg	Cable Diameter mm / inch	Cable Storage Cap. m
HW-0600	600/270	7.0	3.1:1	Ø19	175	*2.26	-	Ø4.0 / Ø5/32	28
HW-1200	1200/545	20.0	4.1:1	Ø50	210	*2.84	-	Ø4.8 / Ø3/16	29
HW-2000	2000/900	4.5	41:1	Ø48	195	*5.1	*4.8	Ø5.6 / Ø7/32	11*2

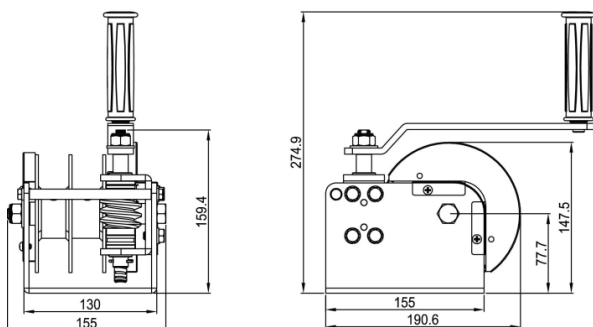



HW-2000 (with handle)

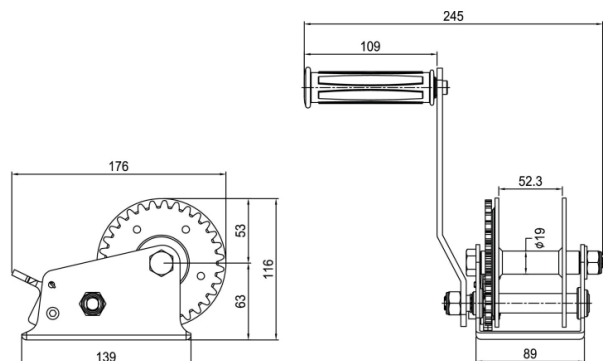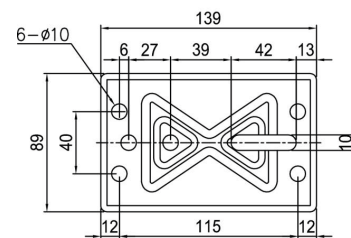

HW-600

Industrial Winch

- 2200lb/1000kg lifting and 4400lb/2000kg pulling capacity.
- Ratchet handle permits reciprocating handle movement in both directions for lifting and lowering loads.
- Positive load-actuated brake can hold the load in any position.
- Gears and brake are fully covered to prevent dust, dirt and rain contamination.
- Very low operator effort is required for easy operation.
- Ratchet handle accommodates installation in cramped locations such as wall and floor.

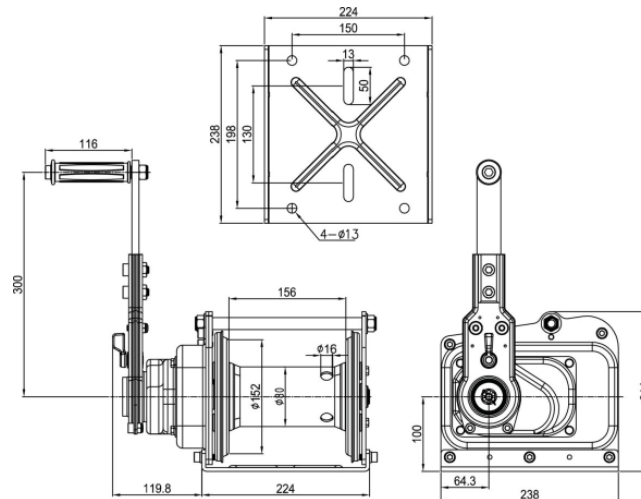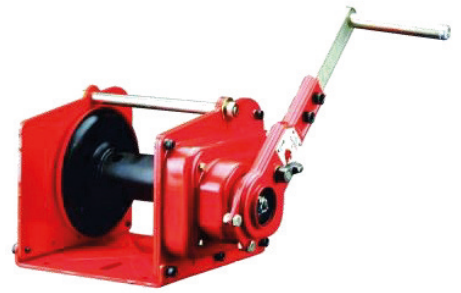

Product Number	Pulling Capacity lbs/kg	Lifting Capacity lbs/kg	Hand Force Required kg	Gear Ratio	Hub Diameter mm	Handle Length mm	Unit Weight (with handle) kg	Cable Diameter mm / inch	Cable Storage Cap. m
SF-2200	4400/2000	2200/1000	10	22.2:1	Ø80	300	17.5	Ø8.0 / Ø5/16	45

Bespoke Winches

We produce standard worm-gear and planetary-driven winches for lifting, pulling, man-riding, mooring and anchoring. They range from 100 kg to 100 tons and are electrically, hydraulically or pneumatically driven.


Capstans

We provide rugged, self-contained worm gear or planetary capstan systems with electric, hydraulic or pneumatic transmission. All capstans can be ATEX-rated, where required. We can also equip capstans with watertight or drip-waterproof motors and self-aligning mounting plates for high static loads.



Umbilical Winches

We provide rugged, self-contained worm gear or planetary capstan systems with electric, hydraulic or pneumatic transmission. All capstans can be ATEX-rated, where required. We can also equip capstans with watertight or drip-waterproof motors and self-aligning mounting plates for high static loads.

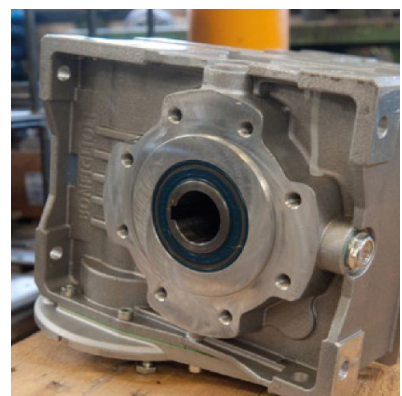



Dublin

D24 C7PY
+353 (0) 1 885 5333

Rathnew

A67 XN36
+353 (0) 1 885 5333

Belfast

BT36 4TY
+44 (0) 28 9083 1780

Wexford

Y35 YP7N
+353 (0) 53 918 3990

Cork

T12 YE10
+353 (021) 431 1614

London

DA8 1DG
+44 20 7476 0793

Berkshire

RG7 4PW
+44 (0) 118 981 1773

Bristol

GL12 8JB
+44 (0) 1454 332270

Plymouth

PL1 4RW
+44 (0) 1752 418027

Southampton

SO53 4DR
+44 (0) 23 8200 1436

Yeovil

BA20 2YB
+44 (0) 1935 704076

